

I. General Remarks Concerning This Response

Claims 1-50 are currently pending. No claims have been amended, added, or canceled in this response. Applicant thanks the examiner for withdrawing the objections to the specification, the objections to the drawings, the 112 rejection, and the 102(b) rejection in the previous Office action in view of the previous amendments and response. Applicant also thanks the examiner for discussing the rejection, particularly the Feddeler reference, by telephonic interview on multiple occasions.

II. Summary of Present Invention

A simple electronic horological device, termed a time cell, is presented with associated methods, systems, and computer program products. A time cell has an insulated, charge storage element that receives an electrostatic charge through its insulating medium, i.e. it is programmed. Over time, the charge storage element then loses the electrostatic charge through its insulating medium. Given the reduction of the electric potential of the programmed charge storage element at a substantially known discharge rate, and by observing the electric potential of the programmed charge storage element at a given point in time, an elapsed time period can be determined. Thus, the time cell is able to measure an elapsed time period without a continuous power source. One type of time cell is a binary time cell that may have a form similar to a non-volatile memory cell. At a given point in time after the binary time cell has been programmed, a read operation allows a binary determination as to whether

or not a particular time period has elapsed by observing two possible states of the time cell: the time cell has retained enough charge such that the time cell appears to be a programmed time cell; or the time cell has been discharged during the elapsed time period such that the time cell appears to be a non-programmed time cell. A time cell can be designed and/or programmed to select the particular time period to be measured.

10 **III. Provisional Nonstatutory Double Patenting Rejection**

The Office action has rejected claim 1 under the judicially created doctrine of obviousness-type double patenting as being unpatentable over claim 1 of copending applications 09/703,340, 09/703,334, and 09/703,335. This rejection is traversed.

Applicant disagrees that claim 1 of the present application is obvious over claim 1 of each of the related, co-pending applications. More importantly, the rejection does not provide a proper basis for the obviousness rejection. The rejection states in its entirety:

Although the conflicting claims are not identical, they are not patentably distinct from each other because discloses [sic] a time cell, which experiences a transition of states after a programming (charging) operation, detection means for detecting a value within a charge storage element, which is located within the time cell.

The rejection states that the claims are not identical, so a double patenting rejection under 35 U.S.C. § 101 is not appropriate, yet the rejection does not contain a motivational statement as to why one having ordinary skill in the art would

have been motivated to modify any of the claimed structures in the other patent applications to reach the device in claim 1 of the present application. Applicant cannot argue further against the obviousness-type double patenting rejection
5 without a secondary reference or some other motivational basis against which to argue.

IV. General Comments Regarding Obviousness Rejections

Prior to discussing deficiencies in the rejections of
10 individual claims, Applicant presents some initial, general comments concerning each of the obviousness rejections. As a first initial point, the rejections state within multiple statements that a prior art reference or a combination of prior art references teaches a "time cell". In addition, the
15 rejection contains statements as if the term "time cell" was prevalent in the prior art at the time of the present invention, which was not the case. Applicant would like to clarify for the record that a time cell was a novel entity that was disclosed by the present patent application (and its
20 related patent applications). The term "time cell" was coined by the present patent application (and its related patent applications) to distinguish the present invention from prior art memory cells. A patent applicant is allowed to be his/her own lexicographer as long as a term that is used in the claims
25 does not have an art-accepted meaning that significantly differs from the applicant's use of the term and the term is adequately defined in the description. Applicant asserts that the term "time cell" should be given significant deference and consideration.

As a second initial point, each of the obviousness rejections on the independent claims relies on Sakaki (USP 5,500,834) as teaching some aspect of the elements in the claim language. More specifically, the rejections use the fact that Sakaki teaches the use of a capacitor, and the central argument of each of the rejections is that the use of a capacitor has characteristics that are equivalent to various characteristics of the present invention.

Applicant strongly disagrees with the manner in which the logic in the rejection is formed and argued. Applicant asserts that the obviousness rejections are deficient because the central argument of the rejections uses an erroneous logical foundation from which to build its reasoning.

Applicant put significant effort into distinguishing the manner in which the present invention differs from the prior art. Sakaki discloses the discharge of a capacitor through a resistor; its circuit works by discharging the stored charge in a capacitor through a conductive path. The conductive plates or endpoints in a capacitor are directly connected to conductive leads through which a stored charge flows. In contrast, a time cell in the present invention stores an electrostatic charge in an internal medium of a charge storage element, and the internal medium is substantially surrounded by an insulating medium; there are no conductive leads from the internal medium to other elements in a system through which stored charge can flow. Hence, the structure of the present invention is significantly different from a conventional RC timer or other circuit that employs a

capacitor, and the method of operation is significantly different from an RC timer or some other circuit.

Applicant also took great care in distinguishing the present invention from the prior art, and Applicant discussed the operation of conventional capacitors in the specification. In fact, the specification has an entire section, from page 40, line 16, to page 45, lines 11, devoted to distinguishing the present invention from the prior art that one of ordinary skill in the art might mistakenly conclude teaches the present invention. The section at page 41, line 24, to page 42, line 25, was particularly directed to capacitors; it states:

A capacitor can store energy, and a resistor placed in series with the capacitor will control the rate at which it charges or discharges, which produces a characteristic time dependence that can be modeled by an exponential function. The crucial parameter that describes the time dependence is the "time constant" RC. The time constant or RC product of a series circuit determines the speed at which the voltage across a capacitor can change. In industry, circuits combining resistors and capacitors are important because they can be used in timing circuits, signal generators, electrical signal shaping and filtering, and a variety of electronic equipment. However, the discharge times of a capacitor are generally very short, usually on the order of milliseconds but possibly a few hours, even when very large capacitors are combined with very large resistances or impedances.

Applicant readily admitted the existence of RC circuits and capacitors, yet the rejections are based on aspects of the operation of capacitors which Applicant has already distinguished.

Applicant specifically explained how the present invention is distinguishable from conventional uses of

capacitors, RC circuits, etc.; the most significant portion of the specification states on page 44, line 9, to page 45, line 9 (emphasis added):

5 Moreover, the prior art does not recognize that the
discharge process itself is temporally meaningful for
most electrostatic storage devices. In the case of the
capacitor, in which the prior art does recognize that its
discharge rate is temporally meaningful, the capacitor is
not entirely insulated and only operates through the use
10 of conductive contacts. Moreover, an horologically
practical application involving a capacitor is only
useful because the discharge process then powers other
electrical or electronic components with which it has a
conductive contact. In fact, capacitors are usually
15 employed in a manner which cycles the charging and
discharging processes in order to achieve some type of
electrical time base. Usually called a relaxation
oscillator or a relaxation generator, a fundamental
frequency can be generated by the time of charging or
20 discharging a capacitor or coil through a resistor.
Hence, capacitors require a continuous power source as
they dissipate relatively large amounts of energy for any
horological application, which presents a motivating
factor for the present invention in which the power
25 source can be eliminated while the electronic horological
device continues measuring time.

 In contrast to a capacitor, the present invention
relies upon a discharge process wherein an electrostatic
charge is discharged from an insulated charge storage
30 element over a period of time in such a manner as to
allow one to use the discharge process itself as a
temporally meaningful process. The manner in which the
present invention accomplishes time measurement also
allows for common, daily activities over potentially long
35 periods of time.

The statement in this response should not be interpreted as showing the only sections in the specification in which the present invention can be distinguished from the prior art;

there are multiple places within the specification in which the novel aspects of the present invention were emphasized.

In light of the extent to which the specification discusses the differences between the present invention and the prior art and the extent to which the rejections rely on well-known aspects of RC circuits and capacitors, Applicant argues that the central argument of the obviousness rejections appears not to give enough consideration to various novel characteristics of the present invention. Since the central argument in the obviousness rejections is built on an incorrect analogy between the similarities of the present invention and the prior art, generally with respect to conventional capacitors and RC circuits, the obviousness rejections are deficient and improper.

As a third initial point, at least one basis of rejection employs the use of Applicant's "Admitted Prior Art" in the specification concerning non-volatile memory cells. However, Applicant distinguished the present invention from non-volatile memory cells in the specification in the section at page 39, line 31, to page 40, line 14, which states (emphasis added):

[I]n the prior art, charge leakage from the charge storage elements in non-volatile memory cells was viewed as a detrimental nuisance, and if anything, the prior art taught that charge leakage should be avoided and potentially eliminated. The present invention makes the novel observation that the charge leakage rate can be selected in a manner that allows it to be useful. Using this novel observation, the charge storage element in a non-volatile memory cell can be engineered as an horological device that allows measurements of its operation such that elapsed time periods can be determined. Specifically in this embodiment, as

discussed above, the geometry and physical properties of the insulating medium through which the retained electric charge leaks is selected in a manner which controls the leak rate.

5

Applicant maintains that the prior art teaches away from the novel aspects of the present invention as was originally argued in the specification to prevent the use of admitted prior art from being used in a rejection against the present invention. However, at least one basis of rejection continues to use "Admitted Prior Art" against the claims without providing an argument as to why one of ordinary skill in the art would have been motivated to use the prior art in the manner that is disclosed in the present application.

10

Applicant asserts that a proper rejection needs to provide some independent basis, i.e. prior art, that discloses what is taught in the specification of the present application.

15

Applicant realizes that rejections cannot be discussed abstractly without reference to actual grounds of rejection and actual claim language. Applicant turns now to particular rejections and claims.

20

V. 35 U.S.C. § 103(a)—Obviousness—Sakaki in view of Feddeler and further in view of Admitted Prior Art

25

The Office action has rejected claims 1-17 and 22-50 under 35 U.S.C. § 103(a) as unpatentable over Sakaki et al., "Device for measuring time lapse after turn off of power source and method thereof", U.S. Patent 5,500,834, filed 08/28/1994, issued 03/19/1996, in view of Feddeler, "Method and apparatus for performing power on reset initialization in a data processing system", filed 06/01/1992, issued

30

06/21/1994, and further in view of "Admitted Prior Art". This rejection is traversed.

5 The rejection groups together claims 1, 2, 22-27, 30-38, 46, 47, 49, and 50. The claim language in these claims is not addressed; instead, the rejection addresses these claims in a general manner based on a description of Sakaki, a description of Feddeler, and a description of the Admitted Prior Art, along with an argument as to why one having ordinary skill in the art would have been motivated to combine these teachings.

10 The rejection states: "Sakaki teaches a horological device ..., thereby measuring the electrostatic charge of the capacitor, wherein the above mentioned elements combine to form claimed time cell ...". In other words, the rejection is partially based on a comparison of the present invention with

15 a capacitor in the device of Sakaki. While the rejection provides a fair assessment of the teachings of Sakaki, as noted above, the time cell of the present invention is distinguishable from a capacitor. Hence, Applicant asserts that the obviousness rejection begins with a logically

20 erroneous foundation by comparing the present invention with features in a prior art reference from which Applicant has already distinguished the present invention.

In addition, before the rejection notes the differences between the present invention and the teachings of Sakaki, the

25 rejection states that the features that are disclosed within Sakaki teach the "claimed time cell". In other words, the rejection states that a time cell is taught in Sakaki but then states that certain features of the invention are not taught in Sakaki. Again, as noted above, the term "time cell" was

coined in the present patent application and its related patent applications, and the term "time cell" is disclosed within the specification as comprising many features, including the features that the rejection states are not shown
5 in Sakaki. Applicant asserts that the phrasing of the rejection is inconsistent and clouds the issue as to what features of the present invention are shown in a particular reference.

Most importantly, while Applicant asserts above that the
10 rejection builds on a logically faulty foundation, the rejection contains a major mistake with respect to its interpretation of Feddeler. After the discussion of Sakaki, the rejection continues by stating the following about Feddeler and the Admitted Prior Art:

15 Sakaki does not teach a horological device comprising a floating gate in a floating gate field effect transistor (FGFET), ... Feddeler teaches a data acquisition means that comprising a capacitor that is
20 replaced with a floating gate in a floating gate field effect transistor (FGFET) (col. 4, lines 12+; FIG. 5). Neither Sakaki nor Feddeler explicitly teach the electrical components claimed. The Admitted Prior Art teaches a device comprising all of the structural
25 features shown in FIGURE 1A: ...

The rejection then provides and discusses a motivational statement for combining the teachings of these sources of prior art.

30 However, Feddeler does not teach the substitution of a capacitor with a floating gate FET (FGFET); Feddeler teaches the substitution of a capacitor with an insulted gate FET. At column 4, lines 12-25, Feddeler states:

FIG. 5 illustrates a circuit 71', which is a different embodiment of circuit 71 of FIG. 4. Circuit 71' differs from circuit 71 in the following manner. In circuit 71', capacitor 62 is replaced by an insulated gate field effect transistor 69, and capacitor 70 is replaced by an insulated gate field effect transistor 73. Transistors 69 and 73 may be any combination of n-channel depletion mode transistors, p-channel depletion mode transistors, n-channel enhancement mode transistors, and p-channel enhancement mode transistors. In all other respects, circuit 71' is the same as circuit 71. In circuit 71', transistors 69 and 73 each still serve the function of a capacitor.

Feddeler does not mention the use of a floating gate FET nor the substitution of an FGFET for a capacitor. It is possible that the rejection has improperly equated an insulated gate FET with a floating gate FET. Applicant has attached an description or definition of "field-effect transistor" from the "whatis.com" web site that explains that "the MOSFET was originally called the insulated-gate FET (IGFET), but this term is now rarely used." Hence, an insulated gate FET is not a floating gate FET.

In addition, the different types of transistors that are listed in Feddeler refer to the n-type or p-type doping material that is used to form the channel region within a transistor and to the different types of operational characteristics of certain transistors, e.g., depletion-mode ("normally-on") or enhancement-mode ("normally off") transistors. Applicant has attached to this response a set of pages 484-485 from Whitaker, *The Electronics Handbook*, IEEE Press, 01/1996, which describes the different types of metal-oxide-semiconductor field effect transistors (MOSFETs).

The rejection relies on Feddeler as teaching the substitution of an FGFET for a capacitor, but Feddeler does not mention an FGFET. Moreover, Feddeler merely employs the well-known facts that: (1) the operation of a MOSFET can have significant inherent capacitance that introduces an equivalent capacitor into a circuit; and (2) to achieve certain design advantages or fabrication advantages, a MOSFET might be used in place of a traditional capacitor. Applicant has attached to this response an article, Cloutier, "Class E AM Transmitters", <http://www.amfone.net/21stAM/classe.htm>, that describes the different type of capacitance that are known to be in effect within a MOSFET. These characteristics are sometimes called "parasitic capacitance" because of their unwanted effects that degrade the performance of a device that contains a MOSFET.

Hence, Feddeler does not teach anything more with respect to the present invention than Sakaki because both references are comparing capacitors with the present invention, and explained above, Applicant has already distinguished the present invention from traditional capacitors.

With respect to the motivational statement in the main group of claims that is addressed by the rejection, the rejection states: "It would have been obvious to a person skilled in the art at the time of the invention to not only adapt the Sakaki reference and include a floating gate in a floating gate field effect transistor (FGFET) in place of a capacitor ...". Applicant asserts that the rejection is relying on an improper amount of hindsight in arguing that one would have been motivated to use a floating gate FET in place

of a capacitor. Applicant's own specification teaches the novel insight that a floating gate FET can be modified to produce a device that has useful temporal characteristics. The rejection has not proffered any independent prior art
5 references that teach or suggest these features. Hence, Applicant's own specification is being improperly employed against Applicant's claimed invention.

Moreover, Applicant argues that one having ordinary skill in the art would not have been motivated to modify Sakaki to
10 include an FGFET. First, as was argued above and in the specification, the prior art teaches away from the present invention; one having ordinary skill in the art would only have regarded an FGFET as being useful for holding a threshold voltage for long periods of time, not for possibly relatively
15 short periods of time. Second, as shown in FIG. 3 of Sakaki, a certain temporal pattern of voltages is desired within the circuit taught by Sakaki, and the effect of holding a charge within an FGFET for long periods of time is opposite to the effect that is desired with a capacitor within the circuit
20 taught by Sakaki. Third, the programming operation for an FGFET is relatively long compared with the charging period of a capacitor; as an example, it is well-known that flash memories that use FGFETs are relatively slow compared to other types of memories, and this slowness is due to the time that
25 is required to program an FGFET or to electrically erase an FGFET. Thus, the programming operation for an FGFET would have introduced an unnecessary and undesired delay into the temporal pattern of voltages that is desired within the circuit taught by Sakaki, thereby changing the principle of

operation of Sakaki. Moreover, additional circuitry would be required within the Sakaki device to accomplish the programming operation. MPEP § 2143.01 states the following:

5 If the proposed modification or combination of the prior art would change the principle of operation of the prior art invention being modified, then the teachings of the references are not sufficient to render the claims *prima facie* obvious. *In re Ratti*, 270 F.2d 810, 123 USPQ 349 (CCPA 1959).

10 Applicant asserts that the motivation for combining the references is not logically consistent, and Applicant also asserts that it would not have been obvious to combine the references when doing so requires a change in the principle of
15 operation of the features that are supposedly disclosed in Sakaki, the primary reference.

 With respect to dependent claims 3-5, which includes the feature in claim 3 of "an array of time cells" and the feature in claim 4 of "wherein at least one time cell in the array of
20 time cells has a predetermined time period that differs from a predetermined time period of another time cell in the array of time cells", the rejection has used a principle from *In re Harza*, 274 F.2d 669, 124 USPQ 378 (CCPA 1960). The rejection states that the claimed features are "mere duplication of
25 parts for a multiplied effect". First, it is unclear what would be meant by a "multiplied effect" in the feature that is claimed in claim 4. Second, Applicant disagrees that the feature is a mere duplication of parts as each time cell in the array could measure a different time period; hence, the
30 time cells would not be duplicates of each other, which the argument in the rejection fails to consider.

With respect to claims 6, 7, 28, and 29, which recite various features such as a time cell interface unit and a programming request processing unit, the rejection states that "the combination [of references] does not explicitly comprise ..." but that "any capacitive timing device must inherently possess the structure and means to charge/discharge time cells". First, Applicant argues that the statement in the rejection seems to equate all capacitive timing devices with time cells. As already argued above, the novel term "time cell" was defined in the present patent application, and the term has not been properly interpreted in the rejections, including the rejection of claims 6, 7, 28, and 29. A conventional RC circuit, no matter what its structure is, is not a time cell. Second, the rejection improperly uses an inherency argument by stating: "It would have been obvious to a person skill in the art at the time of the invention to recognize that any capacitive timing device must inherently possess the structure and means to charge/discharge time cells, ...". It is entirely possible for the claimed features to be included in a second device that interfaces with a first device, as described in the specification. Hence, Applicant asserts that the rejection must refer to another reference for these features since they are not found in the prior art references.

With respect to claims 8-12, 42, and 43, which focus on methods of programming and discharging a time cell, the rejection states that "the modified combination of the Sakaki and Feddeler references inherently possess" these methods. Again, Applicant argues that the statement in the rejection

seems to equate all capacitive timing devices with time cells. As already argued above, the novel term "time cell" was defined in the present patent application, and the term has not been properly interpreted in the rejections. In addition, this rejection again misuses an inherency argument. As noted above, the rejection does not describe a manner in which one having ordinary skill in the art would have been motivated to combine the cited prior art teachings to reach the claimed devices, so it is not possible for one having ordinary skill in the art to have been motivated to create the methods of using the claimed devices.

With respect to claims 13-17, 44, and 45, which focus on a computer program product for using an horological device that comprises a time cell, the rejection merely relies on the rejection of other claims. Applicant maintains that the arguments that were presented above with respect to other claims are also applicable to these claims.

With respect to dependent claim 39, which states that the selected thickness of the tunneling region is less than 7 nanometers, the rejection improperly applies the term "tunneling region" to a typical RC timer circuit. The rejection states: "By applying a typical RC timer circuit characteristics regarding thickness of the insulating region, the electrostatic discharge of a charge storage element can be controlled." The entire argument appears to illogically discuss a tunneling region of a floating gate transistor with respect to capacitive plates in an RC timer circuit; the rejection then jumps to an illogical conclusion. Applicant asserts that the claimed feature is not shown in the prior art

nor could one apply the teachings of one reference to the other in the manner that is described by the rejection.

With respect to dependent claim 48, which recites that the time cell of the present invention could be used in a smart card, the rejection states that the combination of the prior art references does not disclose this feature, but then the rejection jumps to the conclusion that it would have been obvious to have used the claimed device in a smart card. Applicant asserts that the rejection improperly uses Applicant's own teachings against the claimed invention.

Examiner bears the burden of establishing a prima facie case of obviousness.

The examiner bears the burden of establishing a prima facie case of obviousness based on the prior art when rejecting claims under 35 U.S.C. § 103. *In re Fritch*, 972 F.2d 1260, 23 U.S.P.Q.2d 1780 (Fed. Cir. 1992). Only when a prima facie case of obviousness is established does the burden shift to the applicant to produce evidence of nonobviousness. *In re Oetiker*, 977 F.2d 1443, 1445, 24 U.S.P.Q.2d 1443, 1444 (Fed. Cir. 1992); *In re Rijckaert*, 9 F.3d 1531, 1532, 28 U.S.P.Q.2d 1955, 1956 (Fed. Cir. 1993). If the Patent Office does not produce a prima facie case of unpatentability, then without more the applicant is entitled to grant of a patent. *In re Oetiker*, 977 F.2d 1443, 1445, 24 U.S.P.Q.2d 1443, 1444 (Fed. Cir. 1992); *In re Grabiak*, 769 F.2d 729, 733, 226 U.S.P.Q. 870, 873 (Fed. Cir. 1985). In response to an assertion of obviousness by the Patent Office, the applicant may attack the Patent Office's prima facie determination as

improperly made out, present objective evidence tending to support a conclusion of nonobviousness, or both. *In re Fritch*, 972 F.2d 1260, 1265, 23 U.S.P.Q.2d 1780, 1783 (Fed. Cir. 1992).

5 With respect to the claims, the rejection argues that a combination of Sakaki, Feddeler, and the Admitted Prior Art discloses the claims, but Applicant has shown above that the prior art, either singly or in combination, does not disclose the claimed features. The rejection also has not properly interpreted terms within the claim language, and the rejection
10 has also incorrectly interprets the teachings of Feddeler. Moreover, the rejection has used logically inconsistent arguments, and in addition, the rejection has improperly used Applicant's own teachings against the claimed invention. Hence, the rejection does not establish a *prima facie* case of
15 obviousness with respect to claims 1-17 and 22-50. Therefore, the rejection of these claims under 35 U.S.C. § 103(a) has been shown to be improper, and these claims are patentable over the applied reference. Applicant requests the withdrawal of the rejection.

20

VI. 35 U.S.C. § 103(a)—Obviousness—Sakaki in view of Suzuki

The Office action has rejected claims 18-21 under 35 U.S.C. § 103(a) as unpatentable over Sakaki in view of Suzuki, U.S. Patent Number 4,442,363, "Timer Switch for Vehicle",
25 issued 04/10/1984. This rejection is traversed.

Applicant asserts that none of the elements of claim 18 are disclosed within Sakaki nor Suzuki. Each of the elements of claim 18 include the term "memory cell". For example, the fourth element of claim 18 states: "a fourth mode of operation


in which the memory cell transitions from the non-stable memory state to the stable memory state within a predetermined time period". Neither Sakaki nor Suzuki disclose a memory cell at all. Hence, neither Sakaki nor Suzuki can disclose
5 any of the claim elements, particularly the fourth element.

With respect to independent claims 20 and 21, which explicitly recites that a charge storage element has an internal medium that is surrounded by an insulating medium, the rejection again refers to a conventional RC timer circuit.
10 As explained above, the charge storage element that is used in the present invention is distinguishable from a capacitor.

With respect to the claims, the rejection argues that either Sakaki or Suzuki discloses some of the claimed features, but Applicant has shown above that neither Sakaki nor Suzuki
15 does not disclose certain claimed features for which the rejection relies these references to disclose. Moreover, the rejection has not addressed particular elements of the claim language. Hence, the rejection does not establish a *prima facie* case of obviousness with respect to claims 18-21.
20 Therefore, the rejection of these claims under 35 U.S.C. § 103(a) has been shown to be improper, and these claims are patentable over the applied reference. Applicant requests the withdrawal of the rejection.

Explore the TechTarget Network at SearchTechTarget.com.

Activate your FREE membership today | Log-in



[Home](#) [Look It Up](#) [Tech Happenings](#) [Fast Reference](#) [Job Search](#) [Books & Training](#)

[FREE Conferences >>](#)

Whatis.com *Word of the Day*:

> [hot site and cold site](#)

Whatis.com *Target Search™*

Search our IT-specific encyclopedia for:

or jump to a topic:

[Advanced Search](#)

Browse alphabetically:

[A](#) [B](#) [C](#) [D](#) [E](#) [F](#) [G](#) [H](#) [I](#) [J](#) [K](#) [L](#) [M](#) [N](#) [O](#) [P](#) [Q](#) [R](#) [S](#) [T](#) [U](#) [V](#) [W](#) [X](#) [Y](#) [Z](#) <#>

[All Categories](#) → [Hardware](#) → [Electronics](#)

field-effect transistor

EXPLORE THIS AREA: RICH-MEDIA ADVERTISEMENT

See also [bipolar transistor](#) and [transistor](#).

A field-effect transistor (FET) is a type of [transistor](#) commonly used for weak-signal amplification (for example, for amplifying [wireless](#) signals). The device can amplify [analog](#) or [digital](#) signals. It can also switch DC or function as an oscillator.

In the FET, current flows along a semiconductor path called the *channel*. At one end of the channel, there is an electrode called the *source*. At the other end of the channel, there is an electrode called the *drain*. The physical diameter of the channel is fixed, but its effective electrical diameter can be varied by the application of a voltage to a control electrode called the *gate*. The conductivity of the FET depends, at any given instant in time, on the electrical diameter of the channel. A small change in gate voltage can cause a large variation in the current from the source to the drain. This is how the FET amplifies signals.

Field-effect transistors exist in two major classifications. These are known as the *junction FET (JFET)* and the *metal-oxide- semiconductor FET (MOSFET)*.

The junction FET has a channel consisting of N-type semiconductor (N-channel) or P-type semiconductor (P-channel) material; the gate is made of the opposite semiconductor type. In P-type material, electric charges are carried mainly in the form of [electron](#) deficiencies called *holes*. In N-type material, the charge carriers are primarily electrons. In a JFET, the junction is the boundary between the channel and the gate. Normally, this P-N junction is reverse-biased (a DC voltage is applied to it) so that no current flows between the channel and the gate. However, under some conditions there is a small current through the junction during part of the input signal cycle.

In the MOSFET, the channel can be either N-type or P-type semiconductor. The gate electrode is a piece of

PAGE 21
09/703,344

metal whose surface is oxidized. The oxide layer electrically insulates the gate from the channel. For this reason, the MOSFET was originally called the *insulated-gate FET (IGFET)*, but this term is now rarely used. Because the oxide layer acts as a dielectric, there is essentially never any current between the gate and the channel during any part of the signal cycle. This gives the MOSFET an extremely large input impedance. Because the oxide layer is extremely thin, the MOSFET is susceptible to destruction by electrostatic charges. Special precautions are necessary when handling or transporting MOS devices.

The FET has some advantages and some disadvantages relative to the bipolar transistor. Field-effect transistors are preferred for weak-signal work, for example in wireless communications and broadcast receivers. They are also preferred in circuits and systems requiring high impedance. The FET is not, in general, used for high-power amplification, such as is required in large wireless communications and broadcast transmitters.

Field-effect transistors are fabricated onto silicon integrated circuit (IC) chips. A single IC can contain many thousands of FETs, along with other components such as resistors, capacitors, and diodes.

Last updated on: Aug 08, 2000


What's New

Learn more about:

> [Introduction to XML](#)

- [Site Map for whatis.com](#)
- [Our Favorite Technology Blogs](#)
- [Quiz #36: Linux basics](#)
- [Discussion Forums](#)
- [Recently added/updated](#)
- [Order the whatis.com book](#)

 Email a friend:

 Send this page to a friend! [Email a friend](#)

Note: Email addresses will only be used to send site content to your friend(s).

[Home](#) | [Look It Up](#) | [Tech Happenings](#) | [Fast Reference](#) | [Job Search](#) | [Books & Training](#)

[About Us](#) | [Contact Us](#) | [For Advertisers](#) | [For Business Partners](#) | [Career Center Contacts](#) | [Awards](#)

Whatis.com is part of the TechTarget network of industry-specific IT Web sites

APPLICATIONS

[SearchCRM.com](#)
[SearchSAP.com](#)

CORE TECHNOLOGIES

[SearchDatabase.com](#)
[SearchNetworking.com](#)

PLATFORMS

[Search390.com](#)
[Search400.com](#)

PAGE 22
09/703,344

Metal-Oxide-Semiconductor Field-Effect Transistor

485

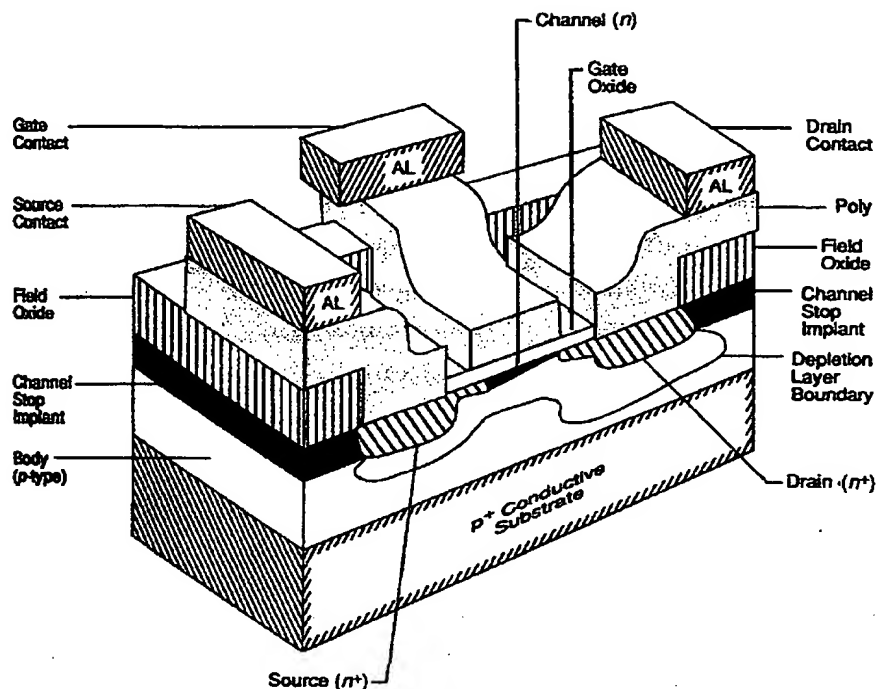


FIGURE 37.1 A high-performance n -channel MOSFET. The device is isolated from its neighbors by a surrounding thick *field oxide* under which is a heavily doped *channel stop* implant intended to suppress accidental channel formation that could couple the device to its neighbors. The drain contacts are placed over the field oxide to reduce the capacitance to the body, a parasitic that slows response times. These structural details are described later. (Source: After Brews, J.R. 1990. The submicron MOSFET. In *High-Speed Semiconductor Devices*, ed. S.M. Sze, pp. 139-210. Wiley, New York.)

The MOSFET channel is created by attraction to the gate and relies on the insulating layer between the channel and the gate to prevent leakage of minority carriers to the gate. As a result, MOSFETs can be made only in material systems that provide very good gate insulators, and the best system known is the silicon-silicon dioxide combination. This requirement for a good gate insulator is not as important for JFETs and MESFETs where the role of the gate is to *push away* majority carriers, rather than to *attract* minority carriers. Thus, in GaAs systems where good insulators are incompatible with other device or fabrication requirements, MESFETs are used.

A more recent development in GaAs systems is the heterostructure field-effect transistor (HFET) [Pearson and Shah 1990] made up of layers of varying compositions of Al, Ga, and As or In, Ga, P, and As. These devices are made using molecular beam epitaxy or by organometallic vapor phase epitaxy, expensive methods still being refined for manufacture. HFETs include a variety of structures, the best known of which is the modulation doped FET (MODFET). HFETs are field-effect devices, not MOSFETs, because the gate simply modulates the carrier density in a pre-existent channel between ohmic contacts. The channel is formed spontaneously, regardless of the quality of the gate insulator, as a condition of equilibrium between the layers, just as a depletion layer is formed in a p - n junction. The resulting channel is created very near to the gate electrode, resulting in gate control as effective as in a MOSFET.

The silicon-based MOSFET has been successful primarily because the silicon-silicon dioxide system provides a stable interface with low trap densities and because the oxide is impermeable to many environmental contaminants, has a high breakdown strength, and is easy to grow uniformly and reproducibly [Nicollian and Brews 1982]. These attributes allow easy fabrication using lithographic processes, resulting in integrated circuits (ICs) with very small devices, very large device counts, and very high reliability at low cost. Because the importance of

PAGE 24
09/703, 344

Class E AM Transmitters

Class E Transmitters are high-efficiency, solid-state transmitters using low-cost standard power MOSFETs. These transmitters are reasonably easy to build, and operate well at frequencies up to *at least* 7 mhz. The frequency limit is constantly being expanded, and this information will be updated as this happens.

An overview of class E operation is presented here. For complete plans, pictures, detailed technical information, schematics, etc. related to class E transmitters, go to [The Official Class E Web Site](#).

Theory of Operation - The Idea Behind Class E


The idea behind class E is to reduce or eliminate the effects that the capacitances within the FET have on efficiency and operation at high frequencies. The other major operational condition is that the FET is only switched (turned on) when there is no voltage across the device and no current flowing through it. This eliminates switching losses.

There are three capacitances at work within the FET itself; the input capacitance, the output capacitance and the so-called "transfer" (drain to source) capacitance. The effects of the capacitances within the FET are reduced by making the capacitances part of resonant circuits rather than "forcing" energy into and out of the capacitances. Let's look at the various elements.

The element we must consider first, as far as class E operation is concerned is the the drain, or output capacitance. This capacitance exists from drain to source. In normal switching arrangements, this capacitance is simply charged and discharged by the FET(s). However, as the frequency is increased, more and more current is required to quickly charge and discharge this FET capacitance. If this current flows through the FET, the FETs internal resistance will dissipate power. The efficiency will drop dramatically as the frequency is increased. In class E, the output network values are chosen such that the output capacitance is part of a total resonant circuit. The capacitor is "charged" by the flyback effect of the tuned circuit.

The diagram below shows a basic class E RF ouput stage, and the drain and gate voltage waveforms when properly adjusted. The DC voltage applied to the drain in this example is 50Vdc. Notice the peak RF drain voltage rises to almost 200v.

PAGE 25
09/703,344

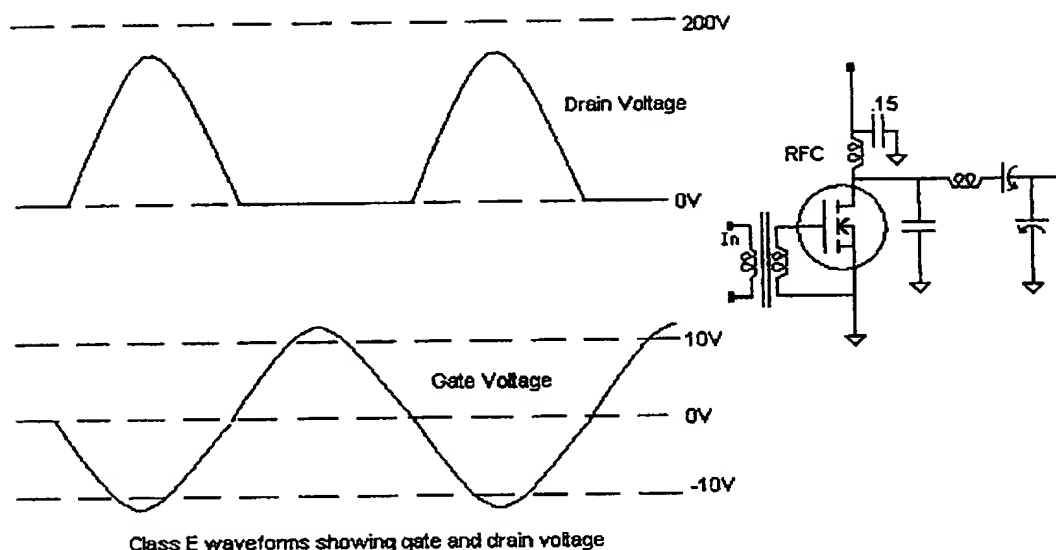

The tuning and circuit values are set such that the drain capacitance (and shunt capacitor connected from drain to ground) will fully discharge (drain voltage falls to zero) *before* the FET is turned on. In this way, the FET is only switched on (by the gate voltage) when there is already no voltage across the FET drain to source. When the FET is switched on, it isn't actually "doing" anything at that moment, voltage-wise.

The gate, or "input" capacitance will prevent the FET from being driven easily at high frequencies. This capacitance is very high in most FETs - in some cases, in the order of thousands of picofarads for a single FET. Values which we would consider to be a "short circuit" to RF in the vacuum tube world are commonplace operating values in the FET world. The most effective way to deal with the input capacitance is to make it part of a resonant circuit, and drive it with a very low impedance driver. All of the energy which is put into the gate is lost in the form of heat, caused by the charging and discharging of the gate capacitance. It is only necessary to drive the gate to about 10v (positive). The FET will be fully saturated at this point. It is possible to "drive" the FET with a square wave, however as the frequency is increased, the amount of power required to force a square wave into the gate capacitance becomes excessive.

The reverse-transfer capacitance effects the ability of the FET to be driven when high voltage is present at the drain. Ideally, you want to choose a FET which has as low a reverse-transfer (also called the Miller capacitance) capacitance as possible. The reverse-transfer capacitance causes the drain voltage to "work against" the gate voltage. Improvements in technology and manufacturing techniques have dramatically reduced reverse transfer capacitances over the past few years. Be aware of this value, along with the related **Gate Charge** value when choosing FETs for RF applications. The lower the gate charge, the better is the FET for RF.

For more information, go to [The Official Class E Web Site](#).

Regards, and talk to you on AM! Steve, WA1QIX

Comments? Email me at cloutier@bicnet.net

PAGE 26
09/703,344


VII. Conclusion

It is respectfully urged that the present application is patentable, and Applicant kindly requests a Notice of Allowance.

5 For any other outstanding matters or issues, the examiner is urged to call or fax the below-listed telephone numbers to expedite the prosecution and examination of this application.

10 DATE: March 20, 2003

Respectfully submitted,


Joseph R. Burwell
Reg. No. 44,468
ATTORNEY FOR APPLICANT

15

Law Office of Joseph R. Burwell
P.O. Box 28022
Austin, Texas 78755
Voice: 866-728-3688 (866-PATENT8)
20 Fax: 866-728-3680 (866-PATENT0)
Email: joe@burwell.biz